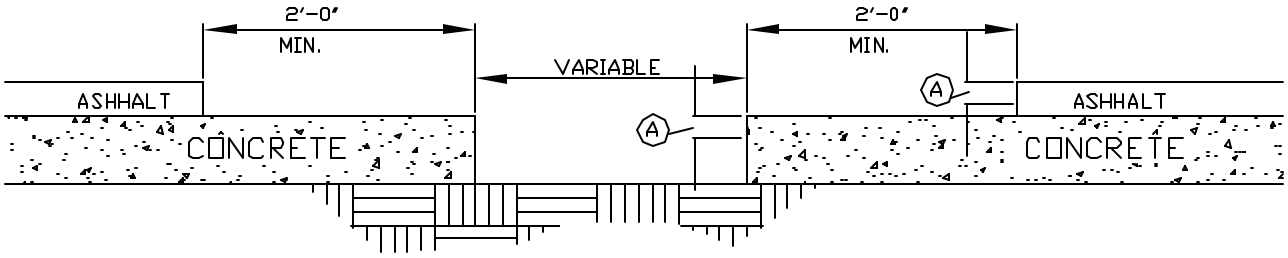

(A) THE MINIMUM SAW CUT ON BOTH ASPHALT & CONCRETE IS TWO INCHES (0'-2").

THE ASPHALT MUST BE TAKEN OUT AT LEAST TWO FOOT (2'-0") FROM THE CONCRETE SAW CUT.

CITY OF GRAND ISLAND PUBLIC WORKS DEPARTMENT	DATE: 11/13/74 DRAWN BY D.L.J. APPVD. BY	STANDARD PAVEMENT SAW CUT	PLAN 139