


MINIMUM COMMERCIAL DRIVEWAY REQUIREMENTS  
 ALTERNATE NO.2 MAY BE SUBSTITUTED

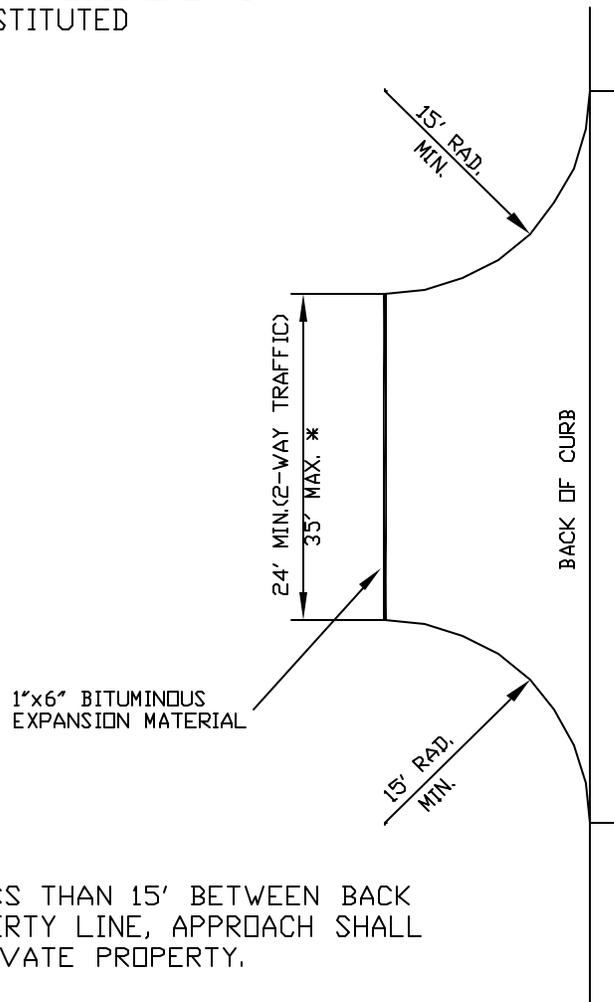

NOTES:

- 1 IF THERE IS LESS THAN 15' BETWEEN BACK OF CURB & PROPERTY LINE, APPROACH SHALL EXTEND ONTO PRIVATE PROPERTY.
- 2 PORTLAND CEMENT CONCRETE TO BE 47B MOD. OR 6 1/2 SACK SAND-GRAVEL. MINIMUM THICKNESS TO BE 6 INCHES
- 3 CURBS CAN BE TAPERED FROM FULL CURB TO NO CURB IN THE RADIUS LENGTH OR BE MAINTAINED AS FULL CURB WHICHEVER FITS THE DESIGN ON PRIVATE PROPERTY

\* WIDER OPENING MAY BE CONSTRUCTED IF APPROVED BY DIRECTOR OF PUBLIC WORKS

ALTERNATE NO.1

REVISED 4/8/96

CITY OF  
**GRAND ISLAND**  
 PUBLIC WORKS DEPARTMENT

DATE: 2/7/89  
 DRAWN BY P.E.S.  
 APPVD. BY W.L.B.

STANDARD FOR  
 COMMERCIAL  
 DRIVEWAY  
 CONSTRUCTION

PLAN  
 116  
 1 of 3